

## Mini Wedge Bag Filter

### Specifications



**Frame:** Galvanized sheet metal for 20 mm header frame  
**Media:** Synthetic fiber (100% Polyester)  
**Efficiency:** G4~F8 (EN 779) / MERV 8~14 (ASHRAE 52.2)  
**Thickness:** 2~50 mm  
**Fire retardant grade:** UL900  
**Max. Temperature:** ≤ 70°C  
**Max. Humidity:** ≤ 100% RH  
**Rec. Final Pressure Drop:** ≤ 200 Pa

### Advantages

- ✓ This media area gives the filter a very large dust holding capacity.

### Applications

Synthetic pocket filters are used in both commercial and industrial applications and others such as hospital, schools and public building. They are installed in general air conditioning plants.

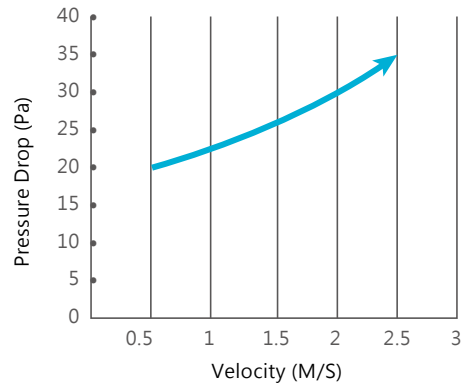

Special Size Customized

Model No.	Actual Size WxHxD (mm)	Airflow Capacity (l/sec)	Filter Rating (EN779:2012)	Initial Resistance High Capacity		Recommended Final Resistance Pa
				In W.G.	Pa	
MW90-G4-01	508 x 408 x 290	523	G4	0.14	35	≤ 200 (0.8 In W.G.)
MW90-G4-02	508 x 508 x 290	655				
MW90-G4-03	635 x 408 x 290	655				
MW90-G4-04	635 x 508 x 290	819				
MW90-G4-05	762 x 508 x 290	982				
MW90-G4-06	610 x 610 x 290	944				
MW90-G4-07	610 x 305 x 290	472				
MW90-G4-08	610 x 305 x 290	472				