

PCO BAG




PCU BAG



Pyracone&Pyracube Deep Bed Bag Filter

Specifications

- Series : Bag Series
- Media: Synthetic fiber (100% Polyester)
- Efficiency: G4 (EN 779) / MERV 8 (ASHRAE 52.2)
- Fire retardant grade: UL900
- Max. Temperature: $\leq 70^{\circ}\text{C}$
- Max. Humidity: $\leq 100\% \text{ RH}$
- Rec. Final Pressure Drop: $\leq 200 \text{ Pa}$

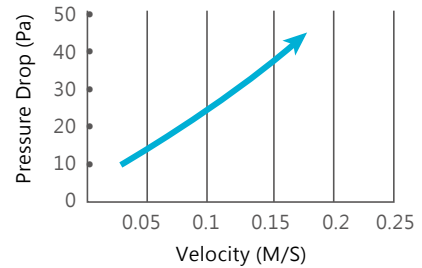

Advantages

- ✓ This media area gives the filter a very large dust holding capacity.

Applications

Synthetic pocket filters are used in both commercial and industrial applications and others such as hospital, schools and public building. They are installed in general air conditioning plants.

Special Size Customized

PCO/PCU BAG

Model No.	Actual Size WxHxD (mm)	Airflow Capacity (l/sec)	Filter Rating (EN779:2012)	Initial Resistance High Capacity		Recommended Final Resistance Pa
				In W.G.	Pa	
				PCU-G4-06	610 x 610 x 660	944
PCU-G4-08	610 x 305 x 660	472				
PCO-G4-06	610 x 610 x 660	944				
PCO-G4-08	610 x 305 x 660	472				